
TAURUS ELITE FLOOR TILES SPECIFICATION

Characteristics

- Thickness: 15mm, 20mm, 30mm
- Composition: Base made from fine granule recycled rubber and recycled EDPM. Top layer: made from high-density SBR and EDPM
- Volume density: Approx. 1400 kg/m3 Top Layer 1000 kg/m3 Base
- Temperature resistance-30°C to +80°C
- Fire resistance: EF1
- Sound improvement: 24dB
- Reduction of force: 61%
- Acoustic absorption: 24dB
- Anti-slip properties: Rated R 10, OS
- Dynamic friction coefficient: μ0.57
- Electrical Properties: -0.7 kV (anti-static)
- Resistance to chemicals: Waterproof, UV-resistant (EN 423), resistant to diluted products.
- Tolerance: Length and Width +/- 5mm Thickness: +/- 2mm



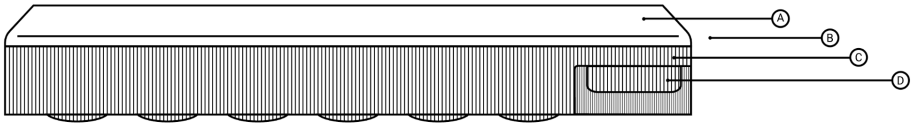

Dimensions:
1m x 1m x thickness 15mm, 20mm, 30mm

A: Resilient top layer that provides solid grip technology, indentation resistance and boosted colour retention, without risk of slip-related injuries.

B: Our moulding process creates an unbreakable seal, fusing the system's dual layers into a dynamic, impenetrable tile that will not separate or weaken, regardless of what you drop on it over any period of time.

C: Highly dense shock layer absorbs maximum force on impact, diminishing barbell bounce and easing joint stress, while simultaneously delivering ideal energy return levels for safer training and drastically boosting flooring performance.

D: The Interlocking Block system locks the corners of 4 bevelled tiles together, minimising shifting during use and reducing cost by allowing the tiles to be loose-laid. (Note: 15mm does not come with an interlocking block system.)

Colours: 15mm: Grey Speckle, Blue Speckle
20mm: Grey Speckle
30mm: Grey Speckle